
Citizen CT-E301 203 x 203 DPI Wired Direct thermal

Citizen CT-E301 203 x 203 DPI Wired Direct thermal POS printer

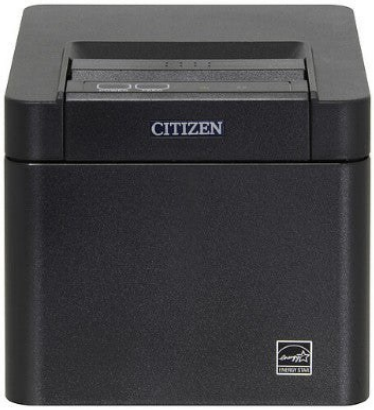

PRINT TECHNOLOGY
Direct thermal

RESOLUTION
203 x 203 DPI

PRINT SPEED
250 mm/sec

MAX PRINT WIDTH
7.2 cm

CONNECTIVITY
USB

PRINTER LANGUAGES
ESC

OVERVIEW

Direct Thermal, 203 dpi, 250 mm/sec, 108 x 125 x 165 mm, 1.3 Kg

KEY FEATURES

- Innovative self-protective housing and disinfectant ready design
- Stylish, modern design
- Anti-curl function
- One hand media change
- Small footprint with the ability to fit alongside POS systems and cash drawers
- USB interface model or triple USB, Serial and Ethernet model available
- Easy customisation by software
- Barcode printing
- Same height as cash drawers
- Cash drawer connection
- Wall mount installation
- Case colour: Available in black or white
- Disinfectant ready
- Self protective housing
- Paper exit: Top exit - ideal for all retail applications
- Paper width: Variable paper width – 58 and 80 mm
- Paper load: Quick and easy media changing - drop-in paper loading
- Printing Speed:
- Fast print out of receipts - up to 250mm per seconds
- Low space requirement - integrated power supply enables clean work station
- Mobile-POS ready
- Easy notification - built-in buzzer

TECHNICAL SPECIFICATIONS

Specifications are supplied by the manufacturer and may change without notice. Issued October 2026.

Printing

Type	POS printer
Print technology	Direct thermal
Print speed	250 mm/sec
Maximum resolution	203 x 203 DPI

Performance

Built-in barcodes	CODABAR (NW-7), Code 39, Code 93, Code-128 Codabar Library, EAN13, EAN8, GS1 DataBar, PDF417, QR Code, UPC-A, UPC-E

Paper handling

Printing media thickness	53 - 85 µm
Maximum roll diameter	8.3 cm
Maximum printing width	7.2 cm
Roll core diameter (max)	8.3 cm

Ports & interfaces

Connectivity technology	Wired
USB port	Yes
Serial interface	Yes

Network

Ethernet LAN	No

Technical details

Product colour	Black
Cutter	Yes

Features

Flash memory	8 MB
Certification	CE, C-UL, VCCI, FCC class A, UL, CCC
Page description languages	ESC

Power

AC input voltage	100 - 240 V
AC input frequency	50 / 60 Hz
Power source type	AC

Operational conditions

Storage temperature (T-T)	-20 - 60 °C
Storage relative humidity (H-H)	10 - 90%
Operating temperature (T-T)	5 - 45 °C
Operating relative humidity (H-H)	10 - 90%

Weight & dimensions

Width	108 mm
Depth	125 mm
Height	165 mm
Weight	1.3 kg

Order or get advice
Speak to the BarcodeGenie team about compatible labels, ribbons and setup.

0113 487 7434
website@barcodegenie.co.uk
Scan to view this product online.

Specifications are supplied by the manufacturer and may change without notice. Issued October 2026.