


Citizen CT-S801III 203 x 203 DPI Wired Direct thermal

Citizen CT-S801III 203 x 203 DPI Wired Direct thermal POS printer

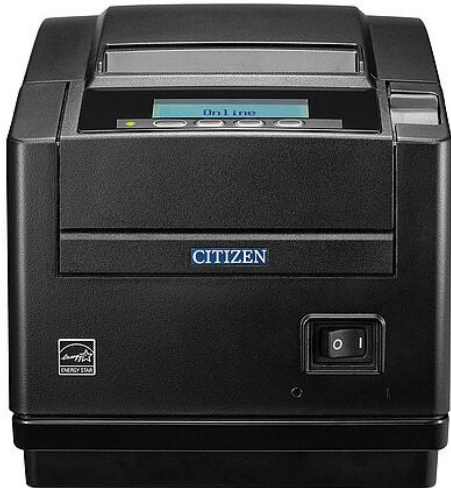

PRINT TECHNOLOGY
Direct thermal

RESOLUTION
203 x 203 DPI

PRINT SPEED
500 mm/sec

MAX PRINT WIDTH
8 cm

CONNECTIVITY
USB

OVERVIEW

203dpi, 500mm/sec, 80mm, USB, 4.23mm

KEY FEATURES

- Customisable LCD operating panel
- Backwards compatibility with previous CT-S models
- Internal detachable power supply
- Print speeds of up to 500mm/sec
- Standard USB interface with optional WiFi, Serial, Bluetooth, Ethernet and Parallel interfaces

TECHNICAL SPECIFICATIONS

Printing

Character sets	852, 857, 863, 864, 866, Katakana, PC850, PC858, PC860, PC865
----------------	---

Type	POS printer
------	-------------

Print technology	Direct thermal
------------------	----------------

Print speed	500 mm/sec
-------------	------------

Maximum resolution	203 x 203 DPI
--------------------	---------------

Line spacing	4.23 mm
--------------	---------

Paper handling

Supported paper width	58 / 60 / 80 / 83 mm (+/- 1 mm)
-----------------------	---------------------------------

Printing media thickness	65 to 75 µm or 75 to 85 µm
--------------------------	----------------------------

Maximum roll diameter	8.3 cm
-----------------------	--------

Maximum printing width	8 cm
------------------------	------

Ports & interfaces

Connectivity technology	Wired
-------------------------	-------

USB 2.0 ports quantity	1
------------------------	---

USB port	Yes
----------	-----

Technical details

Product colour	Black
----------------	-------

Autocutter durability	2 million cuts
-----------------------	----------------

Cutter	Yes
--------	-----

Compliance certificates	CE, RoHS, UL
-------------------------	--------------

Features

Print head life	150 km
-----------------	--------

Half-cutter	Yes
-------------	-----

Receive buffer	4 KB
----------------	------

Design

Built-in display	Yes
------------------	-----

Display	LCD
Power	
AC input voltage	100-240 V
AC input frequency	50/60 Hz
Power source type	AC
Operational conditions	
Storage temperature (T-T)	-20 - 60 °C
Operating temperature (T-T)	5 - 45 °C

Weight & dimensions	
Width	145 mm
Depth	192 mm
Height	148 mm
Weight	2 kg
Packaging content	
Cash drawer included	Yes

Order or get advice

Speak to the BarcodeGenie team about compatible labels, ribbons and setup.

0113 487 7434

website@barcodegenie.co.uk
Scan to view this product online.

